(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 17 February 2005 (17.02.2005)

PCT

(10) International Publication Number WO 2005/015334 A1

(51) International Patent Classification7:

G05D 3/14

(21) International Application Number:

PCT/IB2004/051325

(22) International Filing Date: 29

29 July 2004 (29.07.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

03102466.4

7 August 2003 (07.08.2003) EF


- (71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): STOMMEN, Bernard, J., A. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656

AA Eindhoven (NL). TOUSAIN, Robertus, L. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (74) Agent: ROLFES, Johannes, G., A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: POSITIONING APPARATUS, GRAVITY COMPENSATION DEVICE AND METHOD FOR COMPENSATING GRAVITATIONAL FORCES

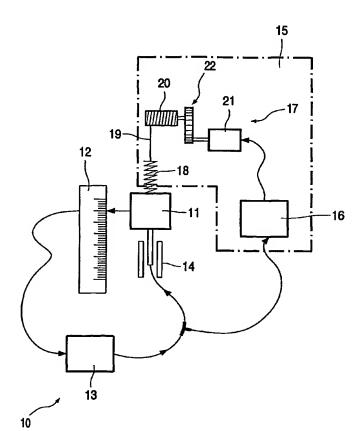

(57) Abstract: The present invention relates to a positioning apparatus. The positioning apparatus comprises at least one position sensor, at least one position controller and at least one position actuator, wherein the or each position sensor measures the position of a positioncontrolled device, wherein the or each position controller uses measurement signals provided by the or each position sensor as input signals, and wherein output signals generated by the or each position controller are used by the or each position actuator to control the position of said position-controlled device. The positioning apparatus further comprising gravity compensation means compensating gravitational forces acting on said position-controlled device, wherein the gravity compensation means comprises at least one gravity compensation controller and at least one gravity compensation actuator, wherein the or each gravity compensation controller uses the output signals generated by the or each position controller as input signals, thereby generating output signals used by the or each gravity compensation actuator to compensate gravitational forces acting on said position-controlled device.